AMCAL
INDUSTRIAL PUMP SOLUTIONS

Tweelindenstraat 13
8810 Lichtervelde

pompen@amcal.be
+32 51 72 44 72

G50 AL series New Available



Easy Replacement
The Best Buy in 2" Alminum
Affordable Prices

Reliable operation


■C-Spool technology




■Useful Reset Button



Compatible



W




A

YAMADA CORPORATION

■Specifications


Model	G50 AL series	
Diaphragm Material	NBR,TPEE,TPO	PTFE
Max discharge volume	670 L/min (177 Gallon/min)	640 L/min (169 Gallon/min)
Max discharge pressure	0.7MPa (100psi)	
Max air consumption	5400 L/min(ANR) (190.7 SCFM)	
Self suction lift(from dry)	3.5m (11.5 ft)	1.3m (4.3 ft)
Noize	88.5 dB [88.5 dB(A)]	96.5 dB [96.5 dB(A)]
Inlet Outlet	Rc 2 or NPT 2	
Air supply	Rc3/4 or NPT 3/4	
Air exhaust	Rc 1 or NPT 1	
Hight in thread center	48 mm (1.89in)	
Hight out thread center	635 mm (25in)	
Distance between in-out	587 mm (23.11in)	
Air supply port	264 mm (10.39in)	
Foot print	257 mm × 229 mm × 14 mm (10.1in × 9.0in × 0.6in)	
weight	29 kg (63.9 lbs)	30 kg (66.1 lbs)

■Dimensions

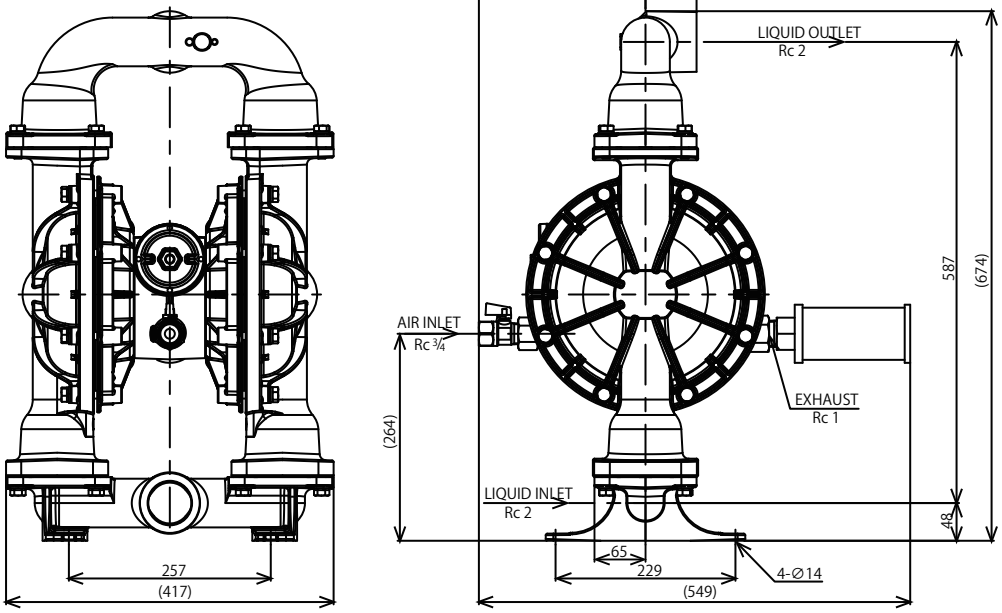


■Performance Curve

・G50AN

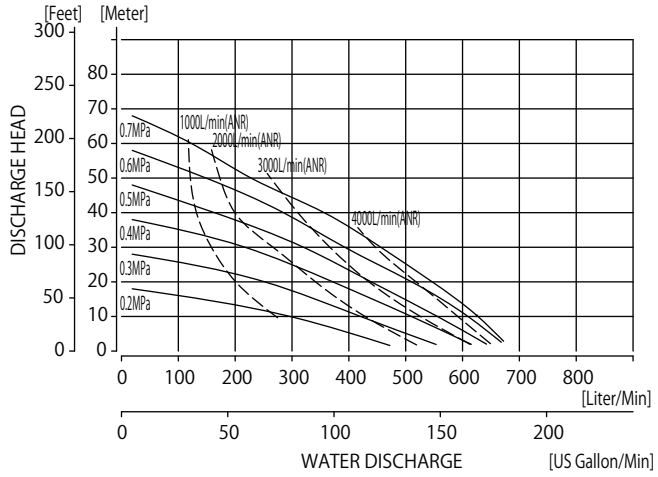

・G50AT

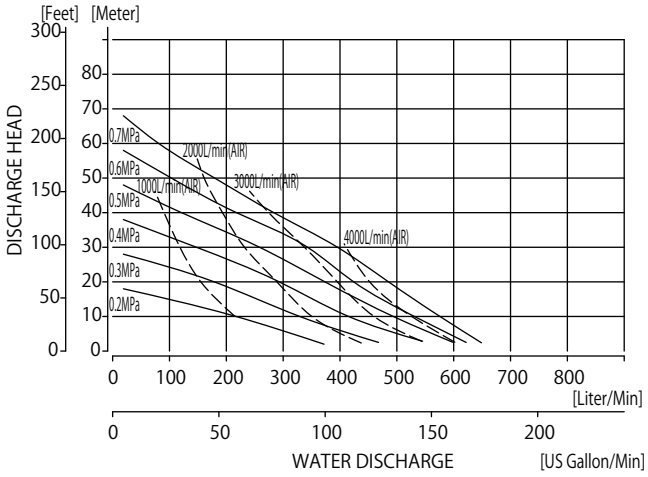

YAMADA CORPORATION
International Department
No.1-3,1-Chome Minami-Magome,Ohta-ku,
Tokyo 143-8504,Japan
Phone : +81-(0)3-3777-0241 Fax : +81-(0)3-3777-0584
E-mail :intl@yamadacorp.co.jp
Web :ap.yamadacorp.co.jp